



# 佶洋閥業有限公司

KING YOUNG VALVE CO., LTD

## DIAPHRAGM CONTROL VALVES

### 膜片式控制凡而

通過 ISO 9001 專業製造廠

PROFESSIONAL MANUFACTURER



電話號碼：(02)2603-2377~9

傳真號碼：(02)2602-2818

電子郵件：king.y6688@msa.hinet.net

roycheng1028@gmail.com

網址：<http://kingyoung.myweb.hinet.net>

地址：新北市林口區湖北里湖子32-6號



# 膜片式控制凡而


DIAPHRAGM CONTROL VALVES FLANGED TYPE. JIS. 10K



K-1001



K-1001

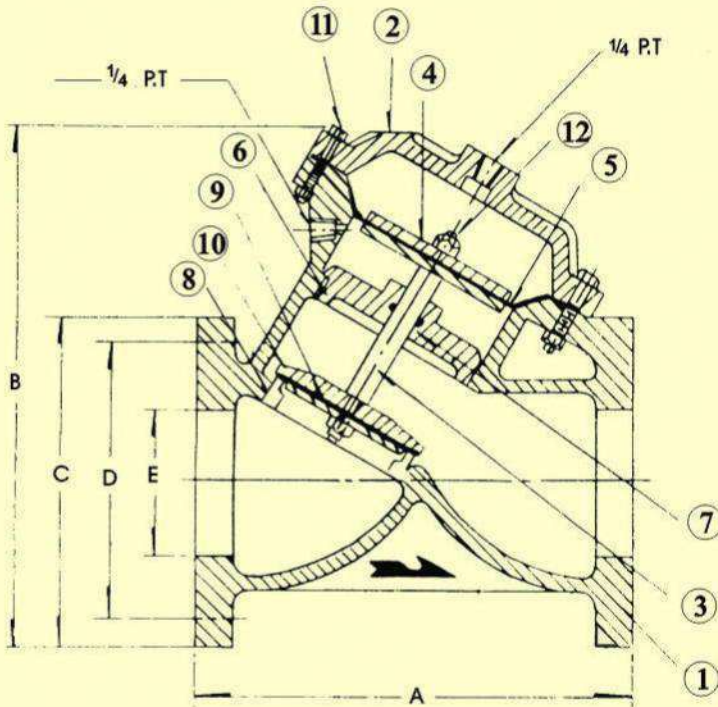


編號	說明	
1	Body	FC20 SUS. 304
2	Cap	Fc20 SUS. 304
3	Shaft	SUS. 304
4	Plates	W. C. B
5	Diaphragm	N. B. R+NVLON
6	Retainer	SUS. 304
7	O-Ring	N. B. R
8	Lower Seat	SUS. 304
9	Gasket	EPDM
10	Disc	SUS. 304
11	Hex Bolt	SUS. 304
12	Nut	SUS. 304

SIZE	1"	1½"	2"	2½"	3"	4"	5"	6"	8"
A	94	152	203	226	270	303	323	432	545
B	125	186	215	250	275	355	420	500	625
C		140	155	175	185	210	250	280	330
D		105	120	140	150	175	210	240	290
E		40	50	65	75	100	125	150	200

佶洋閥業有限公司

KING YOUNG VALVE CO., LTD


# 自動反洗過濾控制表

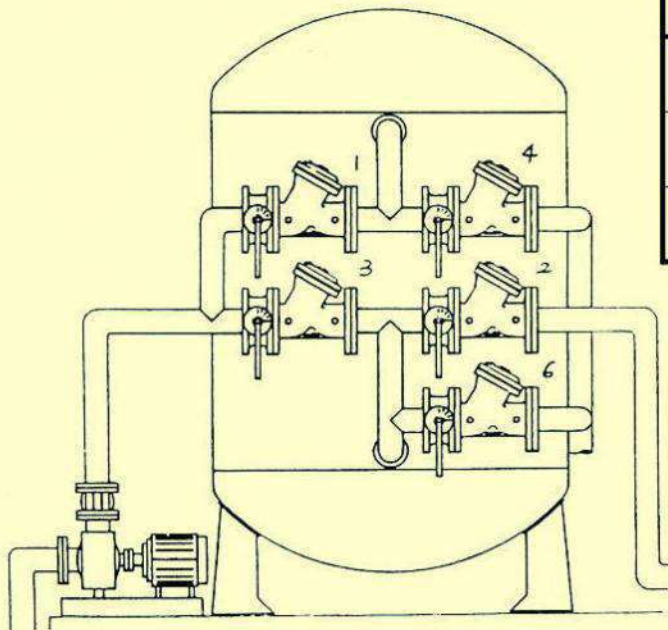

程 序	開 閥 號	關 閥 號
1 正洗	1、6	2、3、4
2 反洗	3、4	1、2、6
3 採水	1、2	3、4、6

## ※調節器

1. 調節器流量大小螺桿，桿為5/8螺絲加螺帽
2. 訂購時請註明是否需要

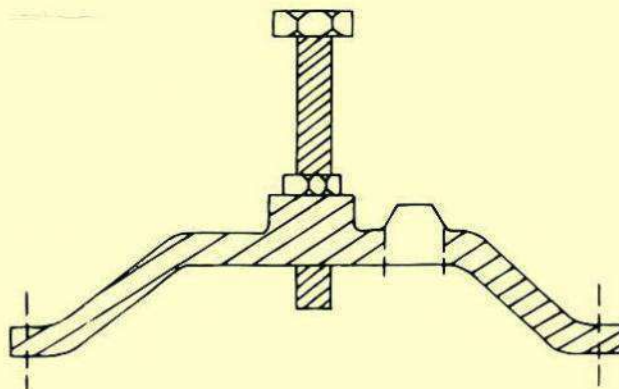

## 產品簡介：

1. 本品以Y型設計能使水流作動時反沖力減弱。
2. 膜片採壓力N. B. R. 加尼龍布製造。最高耐壓力6Kg
3. 操作壓力及線內壓力加1Kg為控制操作壓力。
4. 因未加裝彈簧故無震動情形，但請須用空氣壓力式操作。
5. 適用流體以水為主，如使用在酸鹼性成分高之流體，請另洽商。

## Brief instroduction:

1. Ther product is designed in Y Type so as to weaken the impulse force during the fluid action.
2. It is made of N.B.R and nylon cloth. The highest presure is 7 kg.
3. Operating presure is the presure in the inside of line adds 1kg for controlling it.
4. There is no shaking state due to it does not install spring. But please abopt the method of air presure to operate it.